



13847 Aberdeen Street NE
Ham Lake, MN 55304-6789
stonemountainpetproducts.com

Phone: 763-450-3611
Fax: 763-780-2182
info@stonemountainpetproducts.com


Grooming Dryer Ceiling Mount Installation Instructions

1. Mark Ceiling Tile with Cutting Template



Use the included Ceiling Tile Cutting Template (060-1000-0126-01) to mark the holes to be cut in the ceiling tile.

2. Cut Openings with Utility Knife

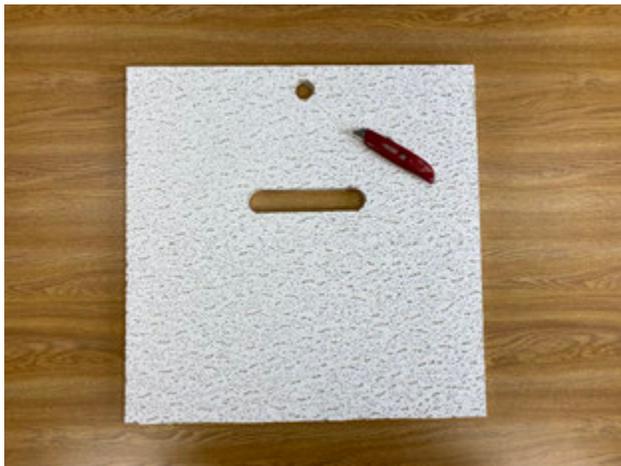

Use a utility knife or other sharp blade to cut holes in the ceiling tile where the actuating wand and dryer hose attachment point will protrude through the tile.

3. Replace Ceiling Tile with Openings



Return your ceiling tile with its new openings to its place in the ceiling grid.

4. Remove Wand from Articulating Joint



Use the 5/64" hex wrench on the set screw to remove the wand handle from the articulated joint. This will make it much easier to lower the end of the articulated joint through the opening in the ceiling tile.

5. Open Ceiling Tiles on Either Side



Stone Mountain Pet Products recommends you open the ceiling tiles on both sides of the position where the ceiling mount will be placed so that two people can carefully lower the dryer attached to its ceiling mount straight down into position.

6. Place Ceiling Mount with Dryer Attached




Stone Mountain Pet Products recommends having a person on both sides of the dryer ceiling mount to lower it straight down into position.

7. Attach Safety Lanyards to Load Bearing



Safety lanyards **MUST** be attached to a load bearing point above the drop ceiling that is capable of supporting 400 lb. Failure to secure the ceiling mount to a proper load bearing point could result in serious injury.

8. Reattach Wand to Articulating Joint

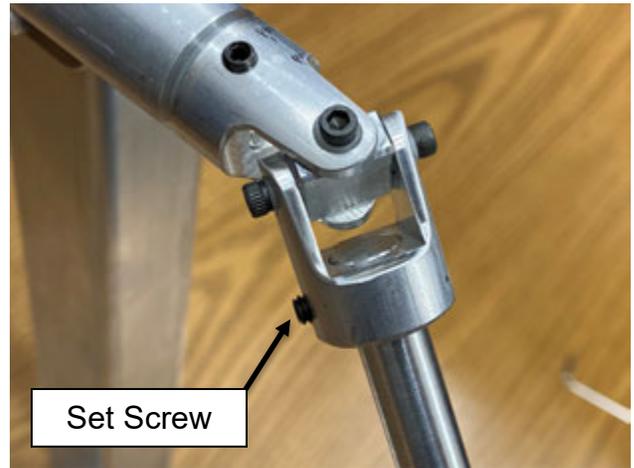

Use the 5/64" hex wrench on the set screw to reattach the actuating wand to the articulated joint which is now protruding from the ceiling.

The flat end of the wand handle should be flush with the inside opening of the articulated joint as show in the photo above.

9. Attach Hose to Dryer



Attach your hose to the hose attachment point which is now protruding from the ceiling.

11. Congratulations! You're Done!



Great work! Installation is complete. Now get grooming, enjoy the noise reduction and never worry about tripping over your dryer's hose or power cord again!